


*Designers & Manufacturers of Drilling & Tapping Solutions*

**Model PQ-2500 & PQ-3250 Self Contained Hydraulically  
Powered Quill Type Power Units**

**Standard Features**

- 7 1/2 GPM, Variable Pressure, Variable Volume Vane Type Hydraulic Pump
- Commercial Temp. and Pressure Compensating Feed Valve
- Commercial Directional Valves
- Commercial Sub-Plate Mounted Hydraulic Cylinders
- Alloy Aluminum Main Body
- Large Quill Diameter and Quill Bearings
- All Ball Bearing, Spline Driven
- ASA I.D. Spindle
- Mounting for Multi Spindle Head
- Conveniently Located Control Dogs
- Heavy-Duty Motor Mounting Bracket with Jack Screw Assembly

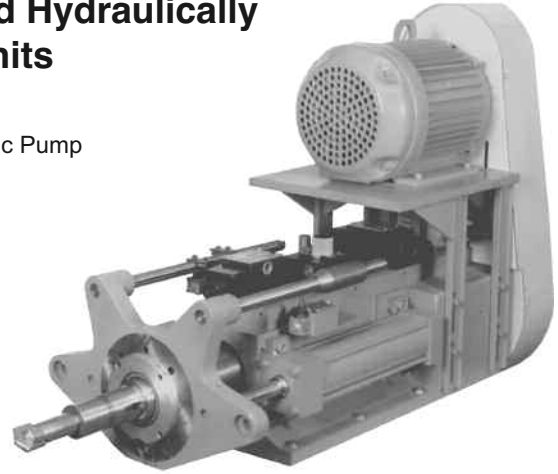

**PQ-2500**

STROKE	0 - 12 INCHES
THRUST	4900 LBS. AT 500 PSI
RAPID APPROACH	110 IPM
MOTOR HORSE POWER	3 TO 20
H.P. TO OPERATE UNIT	3
PUMP RPM	1800
CAPACITY OF RESERVOIR	4 GALLONS

**PQ-3250**

STROKE	0 - 12 INCHES
THRUST	8300 LBS. AT 500 PSI
RAPID APPROACH	80 IPM
MOTOR HORSE POWER	3 TO 25
H.P. TO OPERATE UNIT	3
PUMP RPM	1800
CAPACITY OF RESERVOIR	4 GALLONS

